


Resolution Audio

Cantata Music Center Firmware Update

1. Download the latest firmware images from our website
 - MCU: http://www.resolutionaudio.com/firmware/Cantata_MCU_latest.html
 - FPGA: http://www.resolutionaudio.com/firmware/Cantata_FPGA_latest.html
2. Connect the Cantata Music Center to your wired ethernet network.
3. Open a web browser to the embedded home page:
 - For Mac/Linux, use the localhost address (replace 0123 with the last four characters of the Cantata serial number, for example 2210123
 - <http://cantata-0123.local>
 - For Windows, identify the IP address from your router, for example
 - <http://192.168.11.50>

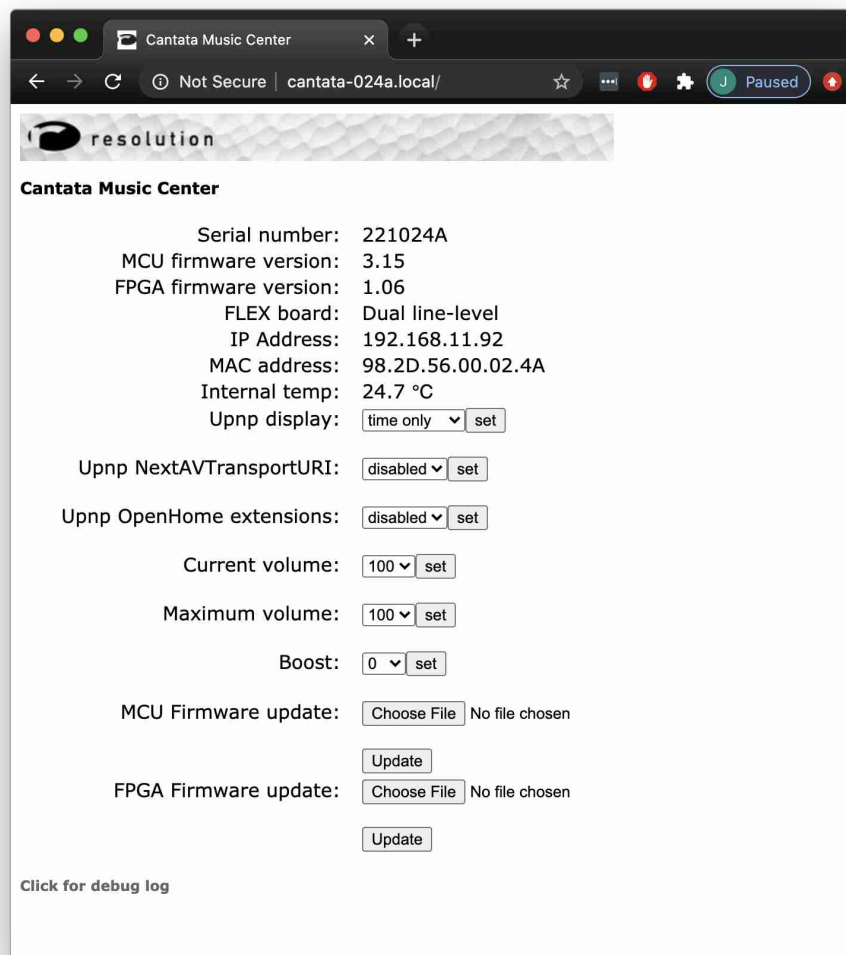

4. To update the MCU, click “Choose File” next to MCU Firmware update. Navigate to the downloaded MCU firmware file. Then click Update.
5. The browser will show update progress. Recent versions of MCU firmware will automatically reset the Cantata when complete, while older versions will enter standby.
6. Once the player reboots, it will take a moment to initialize and rejoin the network. Re-open the home page, and the new version should be indicated beneath the serial number.
7. Updating the FPGA is the same process, using the FPGA Firmware update section.